


RIVETTI A STRAPPO TENUTA STAGNA

Rivetti a strappo tenuta stagna

- A norma DIN 7337
- Occhiello in alluminio
- Chiodo in acciaio inox A2

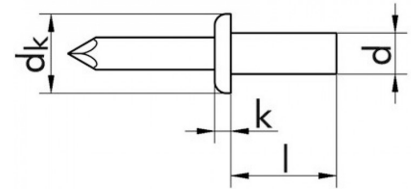

| D Per Ø Fune | Lunghezza | Ø | Ø Foro | Ø Testa | Art. |
|--------------|-----------|-----|--------|---------|---------------------|
| 0.5 - 1.5 | 6,5 | 3,2 | 3,3 | 6.5 | F0939 132 65 |
| 1.5 - 3 | 8 | 3,2 | 3,3 | 6.5 | F0939 132 8 |
| 3.5 - 5 | 9,5 | 3,2 | 3,3 | 6.5 | F0939 132 95 |
| 5 - 6.5 | 11 | 4 | 4,1 | 8 | F0939 14 11 |
| 5 - 6.5 | 12,5 | 4 | 4,1 | 8 | F0939 14 125 |
| 1 - 3 | 8 | 4 | 4,1 | 8 | F0939 14 8 |
| 3 - 5 | 9,5 | 4 | 4,1 | 8 | F0939 14 95 |

